

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 24 TOWNSHIP 17 RANGE 4

DATE: 7-7-01

PARTY CHIEF: Whiteside

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 11-4-96

IN. S.P.C. E ZONE, NAD 83

NAME: 17042401

N: 517867.8490(m)

E: 68675.4490(m)

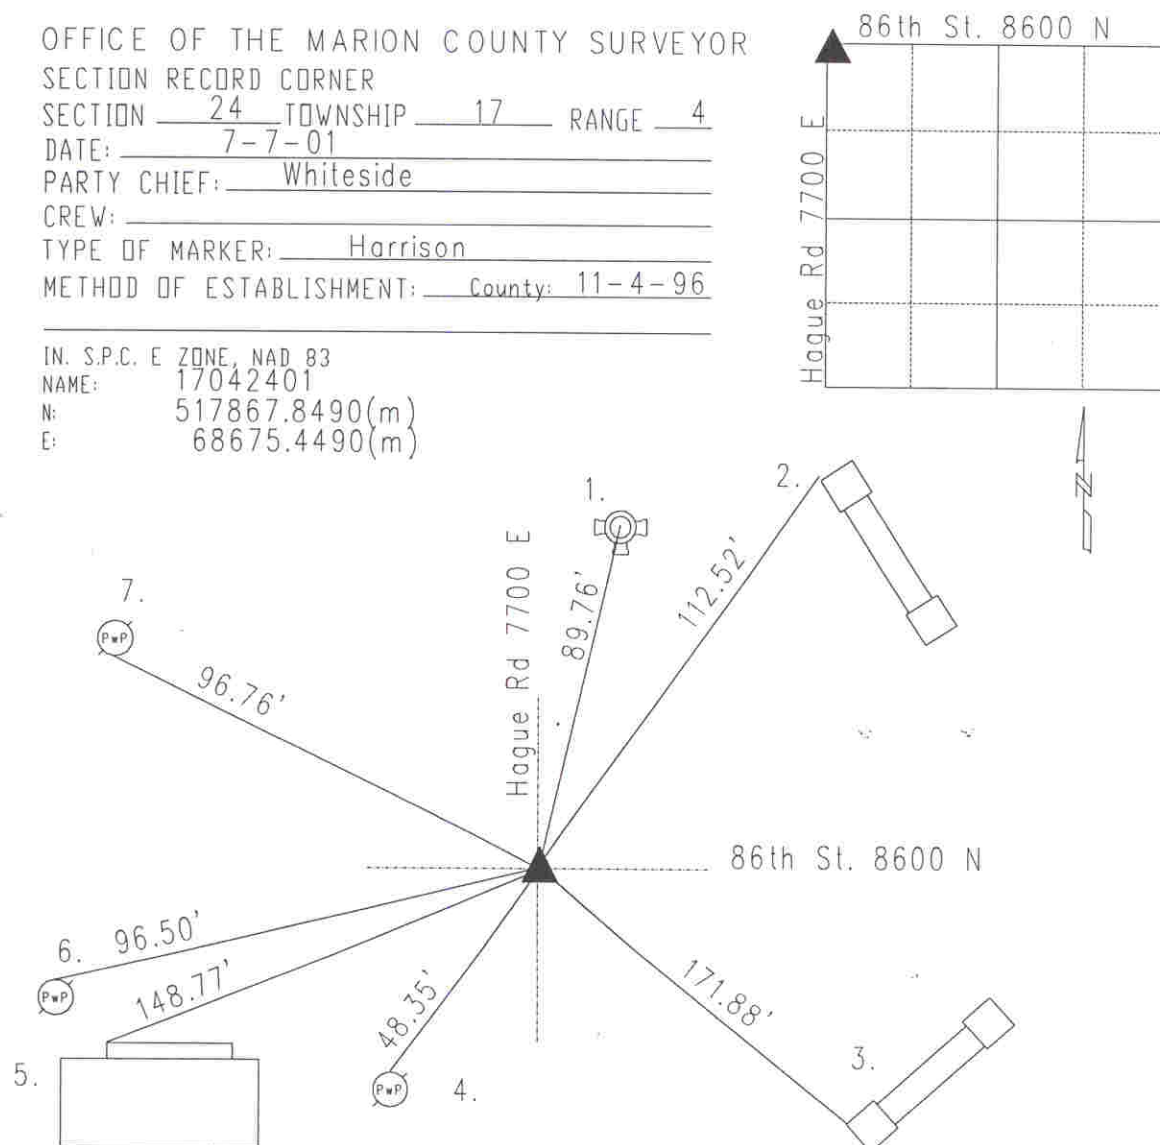

Original post set 1821 by Laughlin with witnesses: 12" beech N 23 E 22 links; 24" dogwood S 55 E 24 links per Marion County Atlas pg. 12 Legal by Wilson 3-14&15-1854 called no stone but witness: a rock N 51 1/4 W 31 1/2 links, rock N 47 E 44 1/2 links per Lawrence Twp pg. 1. Monroe 9-25-59 called a stone 2" dn. Wilcoxon 3-25-76 called stone 8" down. Wilcoxon 8-8-96 called PK nail. Excavated 4-23-96 and a 1/2" rebar fd 6" under stone. Stone was 0.4'W and 0.01'N of rebar. Excavated 10-31-96 Harrison set. Re-tied 11-4-96 by Wilcoxon. Re-tied 7-7-01 by Whiteside.

17042401

REF.	DISTANCE	DESCRIPTION
1.	89.76'	Top nut of fire hydrant
2.	112.52'	SW corner of brick 'church sign' Castlevew Bapt. Church
3.	171.88'	SW corner of 'church sign' Church of Christ
4.	48.35'	PK nail N PwP#14-215 10'up
5.	148.77'	NW corner of slab for ADDRESS 8588
6.	96.50'	PK nail N PwP#48-219B 4"up
7.	96.76'	PK nail w/washer S guide pole no# 12"up